

Top mouting (french style)

Description:

The **SECURILISSE® evo GCE-P** is a collective system against falls from heights, designed for roofs that are inaccessible to the public for top mounting installation.

Details:

Material: Aluminium

Finish : Raw, anodised or powder-coated

Versions existantes : Straight or inclined

Delivery : Delivered with manuals and drawings available online at: <http://extranet.somain.fr>




GCE-DP (straight)

1 Straight guardrail with midrail: GCE-DP2

The **SECURILISSE® evo GCE-DP2** is used for mounting on a 100 to 570 mm high parapet.

REF : 102105

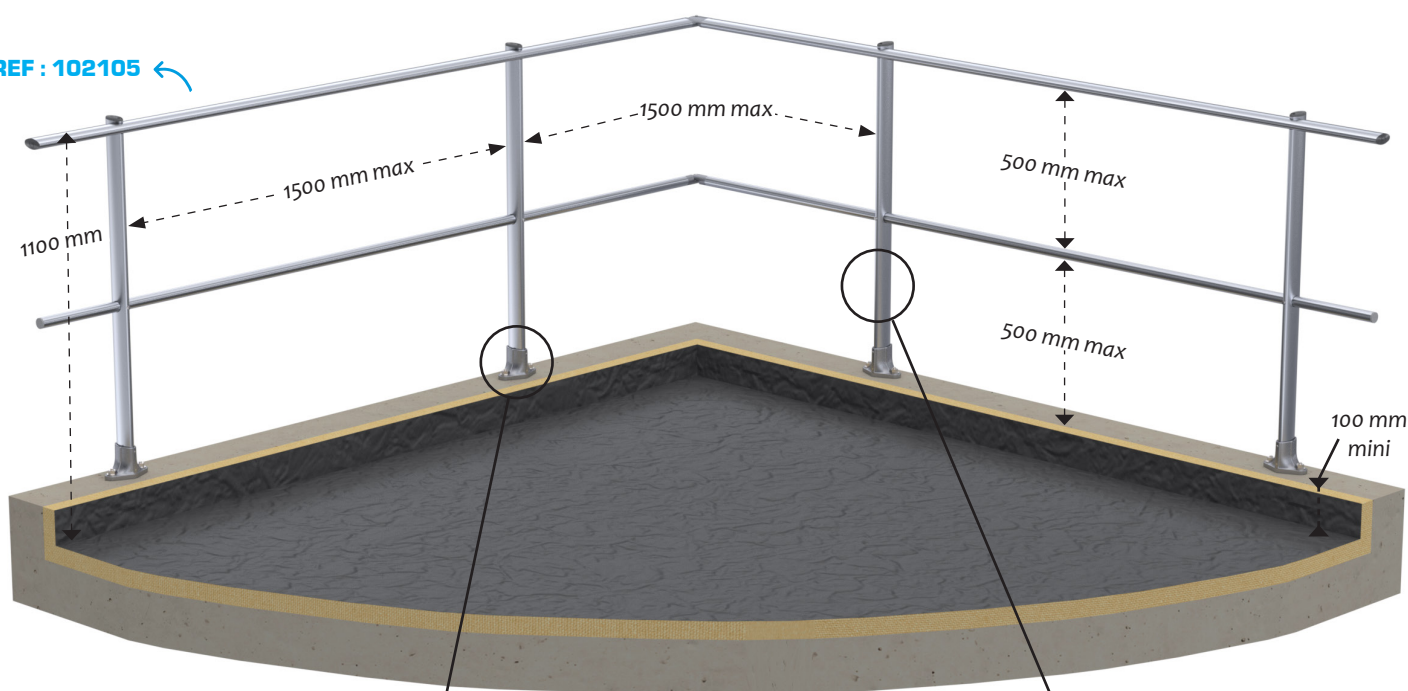


REF : 101640

Base for top mounting.

Fixing: 2 M12

Spacing: 100 mm


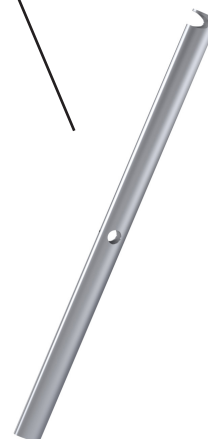


REF : 102331

Straight upright with midrail.
Its length depends on the height of the parapet.


REF : 102329

Straight upright without midrail.
Its length depends on the height of the parapet (higher than 570mm).

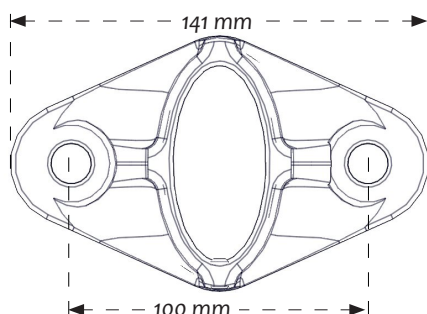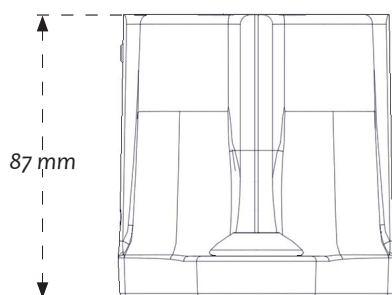


2 Straight guardrail without midrail: GCE-DP1

The **SECURILISSE® evo GCE-DP1** is used for top mounting on a parapet higher than 570 mm.

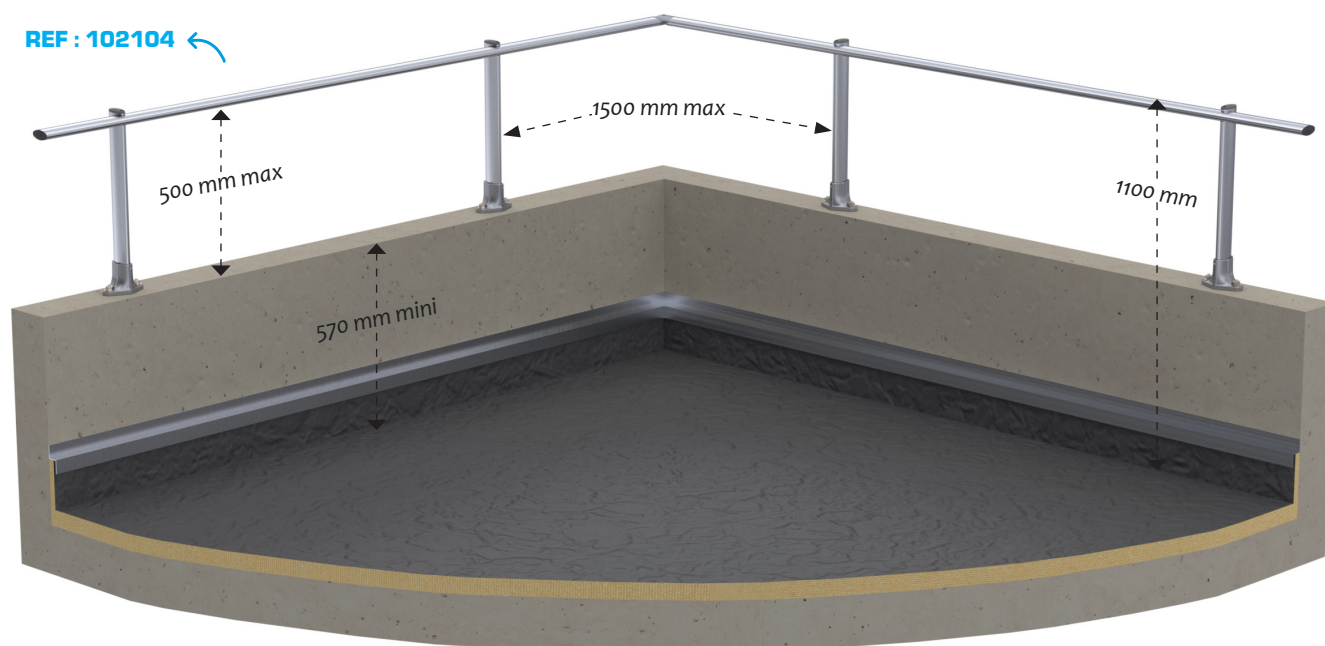

3 Straight Guardrail with midrail and toeboard: GCE-DP3

The **SECURILISSE® evo GCE-DP3** is suitable for work areas without a parapet. The standard then requires the installation of a toeboard.

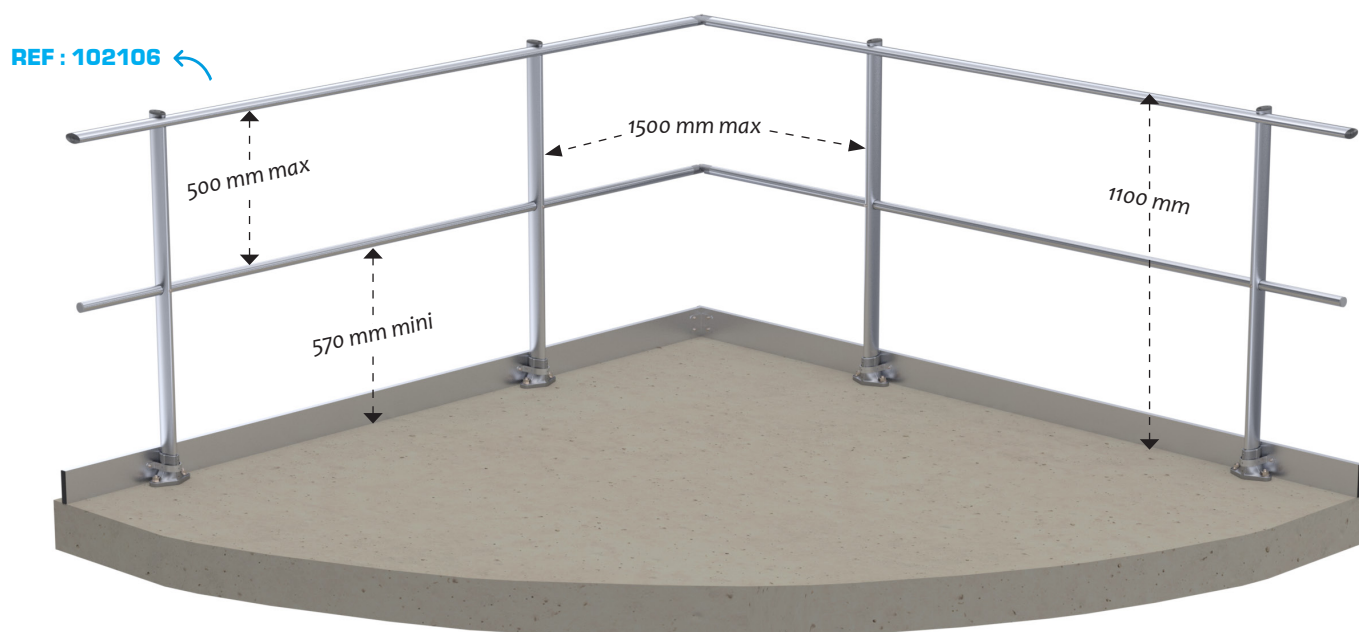


REF : 102331
Standard straight upright.

Toeboard accessory:



REF : 100559
Toeboard fixation for GCE-DP3.
With a parapet of less than 100 mm.



Top mouting (french style)

Description:

The **SECURILISSE® evo GCE-P** is a collective system against falls from heights, designed for roofs that are inaccessible to the public for top mounting installation. The 30-degree inclined version is chosen for aesthetic reasons as it is less visible from the ground.

Details:

Material: Aluminium

Finish : Raw, anodised or powder-coated

Versions existantes : Straight or inclined


Delivery : Delivered with manuals and drawings available online at: <http://extranet.somain.fr>




GCE-IP (inclined)

1 Inclined guardrail with midrail: GCE-IP2

The **SECURILISSE® evo GCE-IP2** is used for mounting on a 120 to 570 mm high parapet.

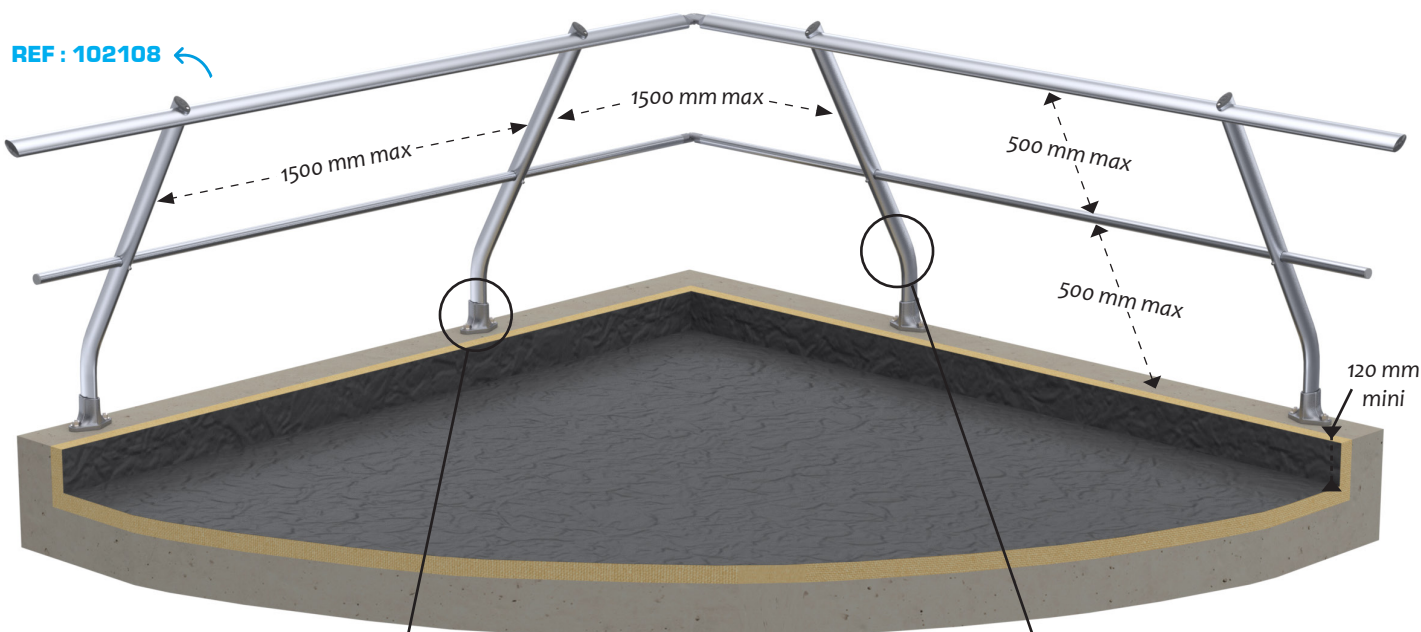

REF : 101640
Base for top mounting.
Fixing: 2 M12
Spacing: 100 mm


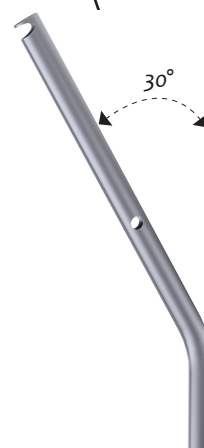


REF : 102332

Inclined upright with midrail.
Its length depends on the height of the parapet.


REF : 102330

Inclined upright without midrail.
Its length depends on the height of the parapet (higher than 570mm).

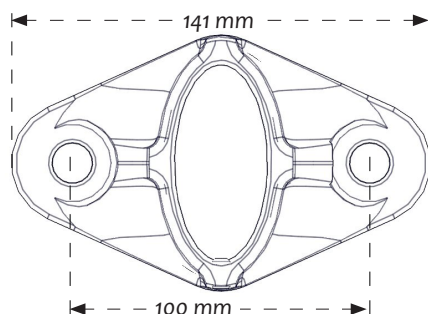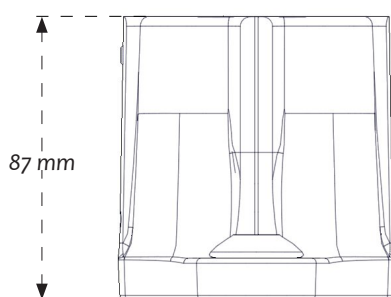


2 Inclined Guardrail without midrail: GCE-IP1

The **SECURILISSE® evo GCE-IP1** is used for mounting on a parapet higher than 570 mm.

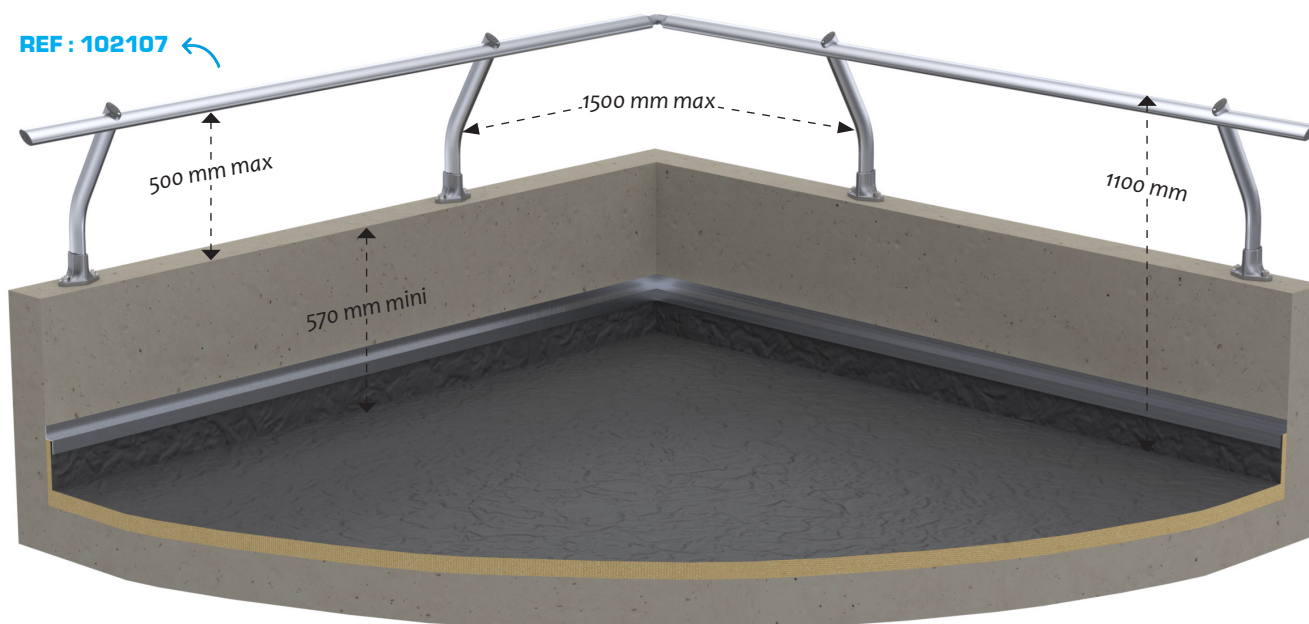

3 Inclined guardrail with midrails and toeboard: GCE-IP3

The **SECURILISSE® evo GCE-IP3** is suitable for work areas without a parapet. The standard then requires the installation of a toeboard.

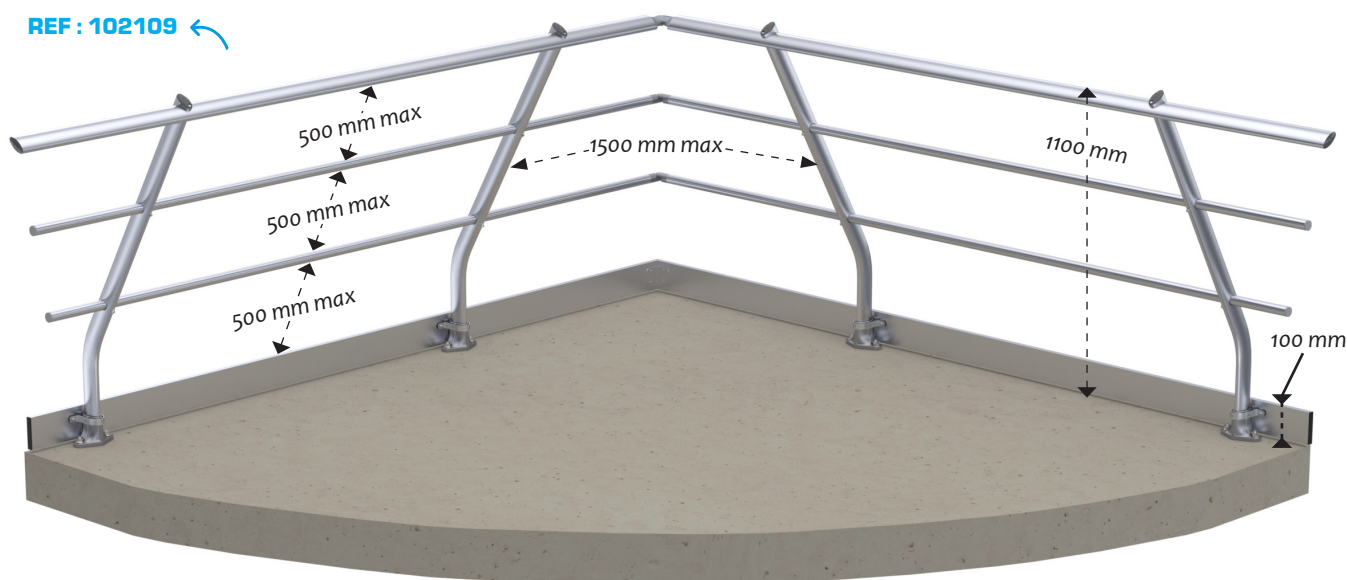

REF : 102331
Standard inclined upright.

Toeboard accessory:



REF : 100559
Toeboard fixation for GCE-IP3.
With a parapet of less than 100 mm.

