

## Free-standing

### Description:

The **SECURILISSE® evo GCE-PL** guardrail allows to secure roofs inaccessible to the public without piercing the waterproofing or removing the cover. The simplified design of the base delivered welded to the upright and the assembly by 4 identical self-tapping screws per upright make this product economical and quick to install.

### Details:

**Material:** Aluminium

**Finish:** Raw, anodised or powder-coated


**Versions existantes:** Straight or inclined

**Delivery:** Delivered with manuals and drawings available online at: <http://extranet.somain.fr>




### GCE-PLD (straight)

REF : 101920

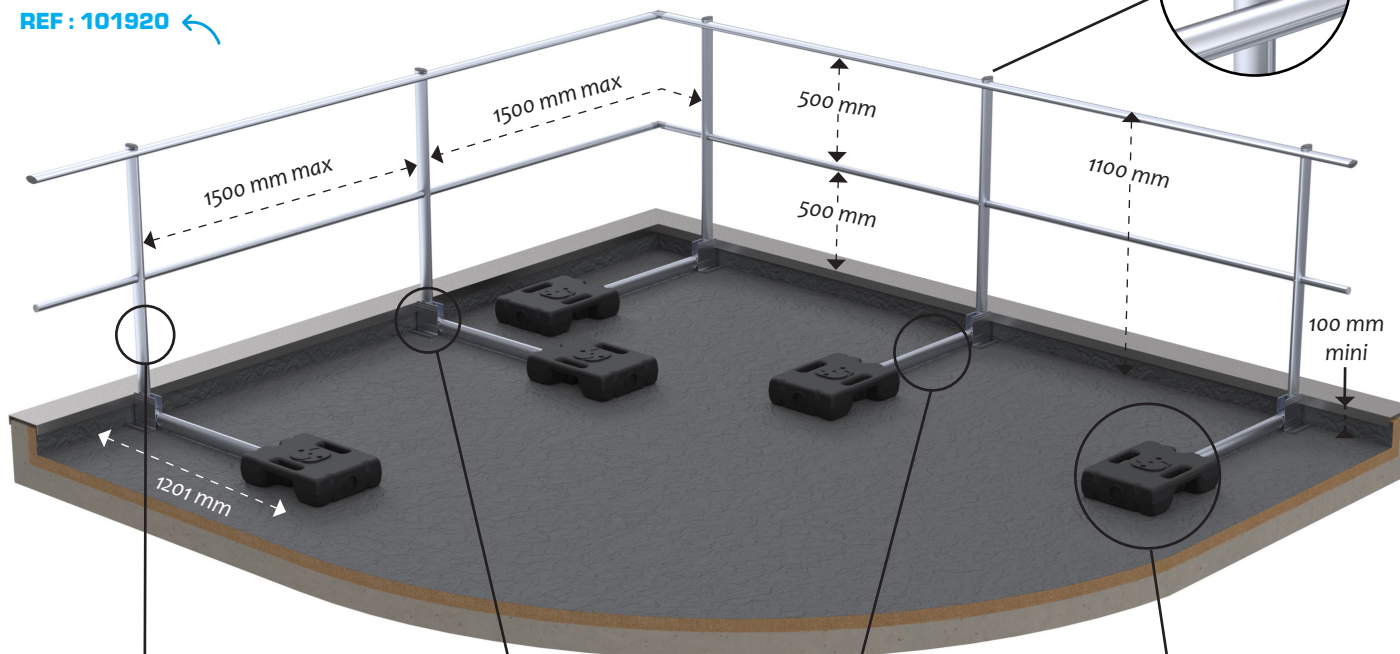


REF : 101908

Straight upright with welded base.



REF : 101967

Resilient sole to be clipped under the base.



REF : 100543


Load strut.



REF : 101648

25 kg ballast weight with HDPE cover.

### Toeboard accessory:



REF : 101289

Adhesive stopper. To be used when there is no parapet.




REF : 101445

Toeboard fixation for GCE-PL. To be used when there is a parapet of less than 100 mm.

**GCE-PLI (inclined)**

REF : 101924

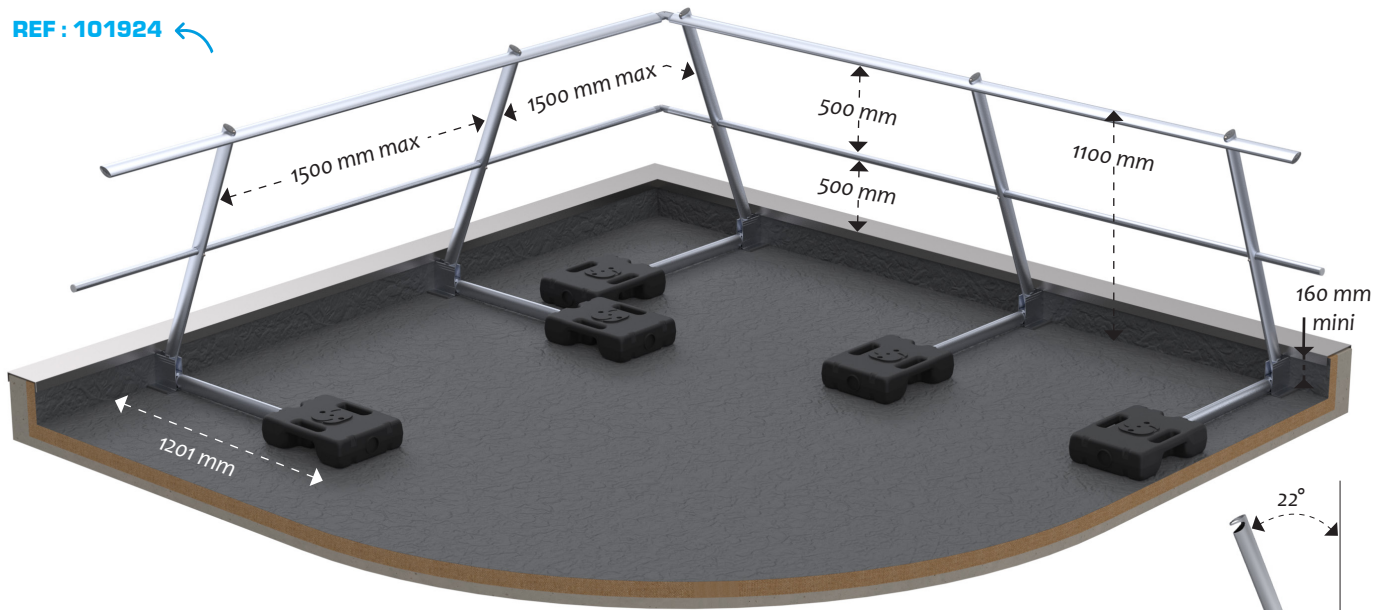

REF : 101925

Inclined upright with welded base.



**GC-PLR (foldable)**

The **SECURILISSE® autoportant rabattable** combines all the advantages of the **SECURILISSE® autoportant**. It meets the most stringent aesthetic requirements thanks to its foldable frame system. Its stability is ensured by ballast weights covered with HDPE to protect building waterproofing.




REF : 007100

Free-standing, 4.5 ml foldable Guardrail.  
Delivered with 3 25kg ballast weights covered with HDPE.



REF : 100883

Angle kit for free-standing, foldable guardrail.

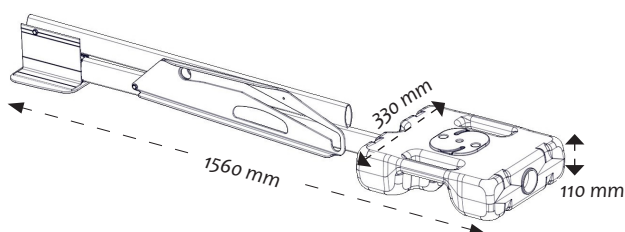

**Toeboard accessory:**



REF : 101289

Adhesive stopper. To be used when there is no parapet.



REF : 101445

Toeboard fixation for GCE-PL. To be used when there is a parapet of less than 100 mm.