

Flexible ladder with rungs in the axis and offset

Description:

The flexible **SECURECHELLE® souple à barreaux dans l'axe** is a means of vertical technical access.

This is a temporary access solution. Thanks to the ladder textile strap uprights, it can be rolled up and stored when not in use.

Delivered in length of 3 m 20.

Up to 5 ladders can be assembled end to end by bolting. (Please contact us for higher volumes) A lifting beam at the top allows the ladder to be installed on a single fixing point.

Details:

Material : Aluminium and textile strap

Finish : Raw or powder-coated

Assembly: Delivered with manuals and drawings available online at: <http://extranet.somain.fr>



Ladder with bars in the axis

Additional information

Length: 3200 mm

Overall width: 516 mm

Useful width: 444 mm

Bar centre-to-centre distance: 270 mm

Weight: 10 kg

REF : 100488

SECURECHELLE® souple à barreaux dans l'axe.


Lenght: 3m20



REF : 100169

Aluminium lifting beam.

17.3 mm diameter hole for fixing to the host structure.

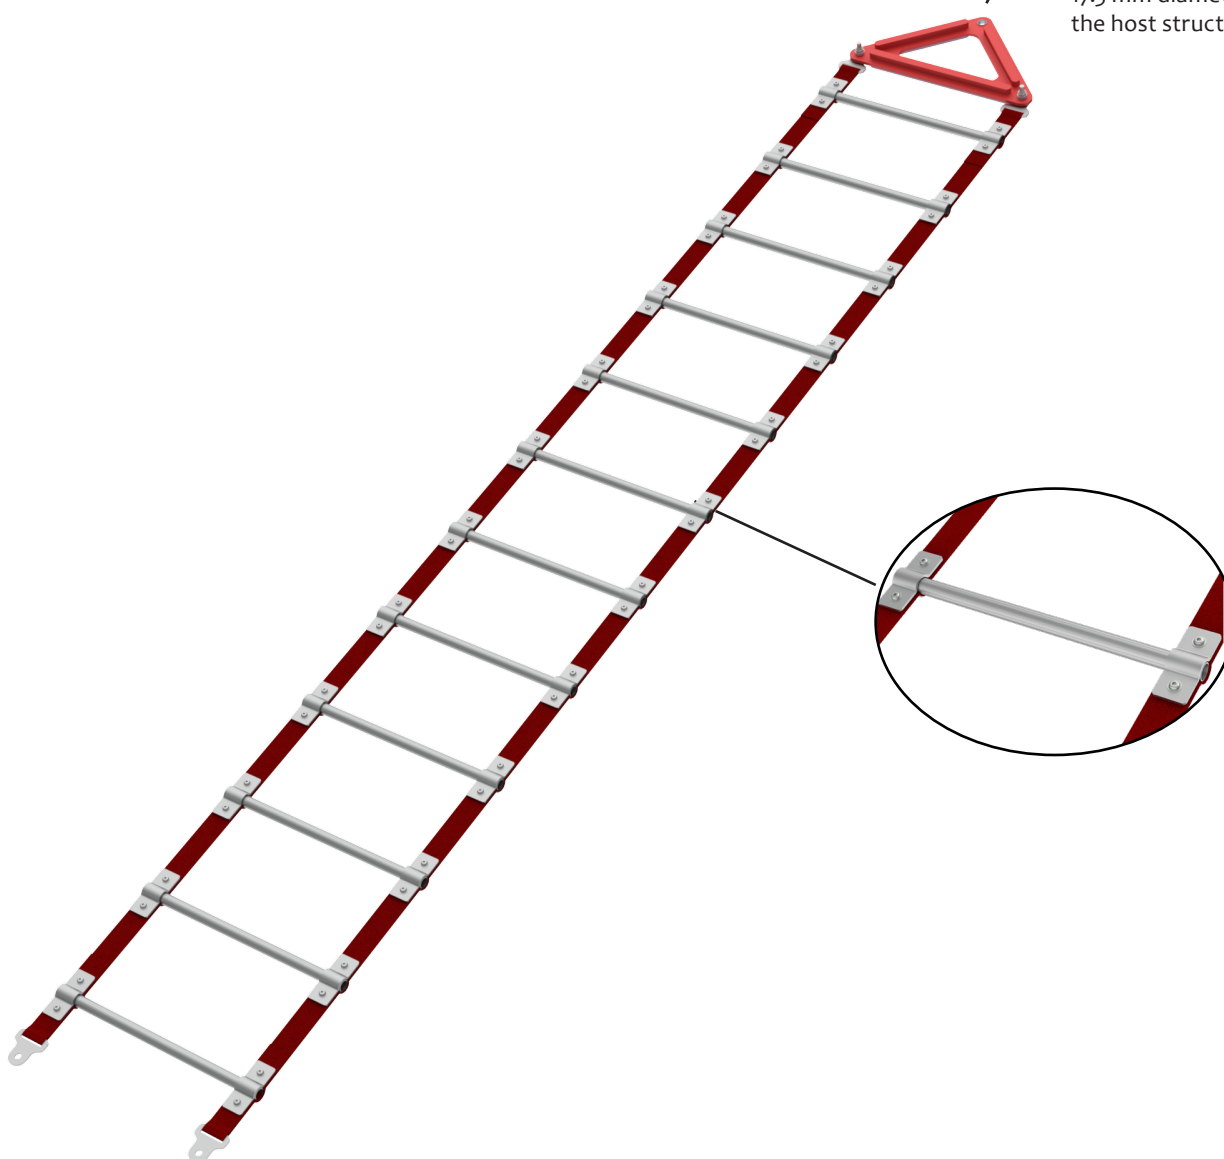

Flexible ladder with rungs in the axis and offset

Description :

The flexible **SECURECHELLE® souple à barreaux décalés** matching the shape of sloping roofs, domes, inclined planes, etc.

This is a temporary access solution. Thanks to the ladder textile strap uprights, it can be rolled up and stored when not in use.

Delivered in length of 3 m 20.

Up to 5 ladders can be assembled end to end by bolting. (Please contact us for higher volumes) A lifting beam at the top allows the ladder to be installed on a single fixing point.

For permanent outdoor installation, we offer a variant with a stainless steel strap replacing the textile straps.

Details:

Material : Aluminium and textile strap

Finish : Raw or powder-coated

Assembly: Delivered with manuals and drawings available online at: <http://extranet.somain.fr>



Ladder with staggered bars

Additional information

Length: 3200 mm

Overall width: 516 mm

Useful width: 444 mm

Bar centre-to-centre distance: 270 mm

Weight: 12 kg

REF : 100485


SECURECHELLE® souple à barreaux décalés.

Length: 3 m 20

REF : 100487

SECURECHELLE® souple à barreaux décalés sur feuillard inox.

Length: 3 m 20

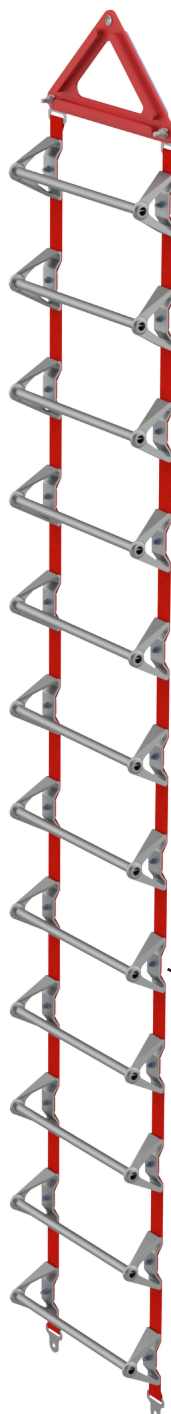

REF : 100169

Aluminium lifting beam.

17.3 mm diameter hole for fixing to the host structure.

Options

Stainless steel strip: The textile straps used for the uprights can be replaced by a stainless steel strap of the same size for permanent installation.

